


DSS Bridge Overhang Brackets provide adjustable deck support for both steel and precast concrete beams.

Min. and Max. Configurations.

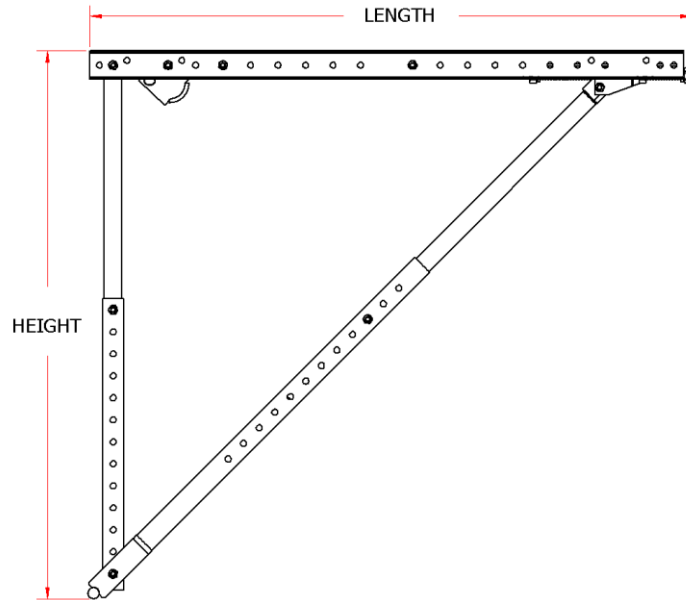

Images are for reference only.

Part No.	Description	Min. Height In [mm]	Max. Height In [mm]	Length In [mm]	Weight Lbs [kg]
SHBOB3050	Standard Overhang Bracket 3050	30 [762]	50 [1270]	54 [1371.6]	46.96 [21.30]
SHBOB5070	Deep Overhang Bracket 5070	50 [1270]	70 [1778]	54 [1371.6]	52.80 [23.95]
SHBOB1628	Junior Overhang Bracket 1628	16 [406.4]	28 [711.2]	27 [685.8]	27.06 [12.27]

Notes:

- The SHBOB3050, SHBOB5070, and SHBOB1628 diagonal leg SWL is 3,750 # at a 2:1 Safety Factor.

General Disclaimers

1. Published load values are based on a safety factor specified in the cut sheet.
2. DSS recommends that all the job layouts be designed by a qualified professional engineer and that all erection and dismantling be performed by Qualified Personnel.
3. Always consider the load bearing capabilities of all components in the system and static loads when using this equipment.
4. Published values are true for components in good condition. DSS recommends inspecting each component before use.