

Medium Duty Post Shores are primarily used in light construction applications and re-shoring.

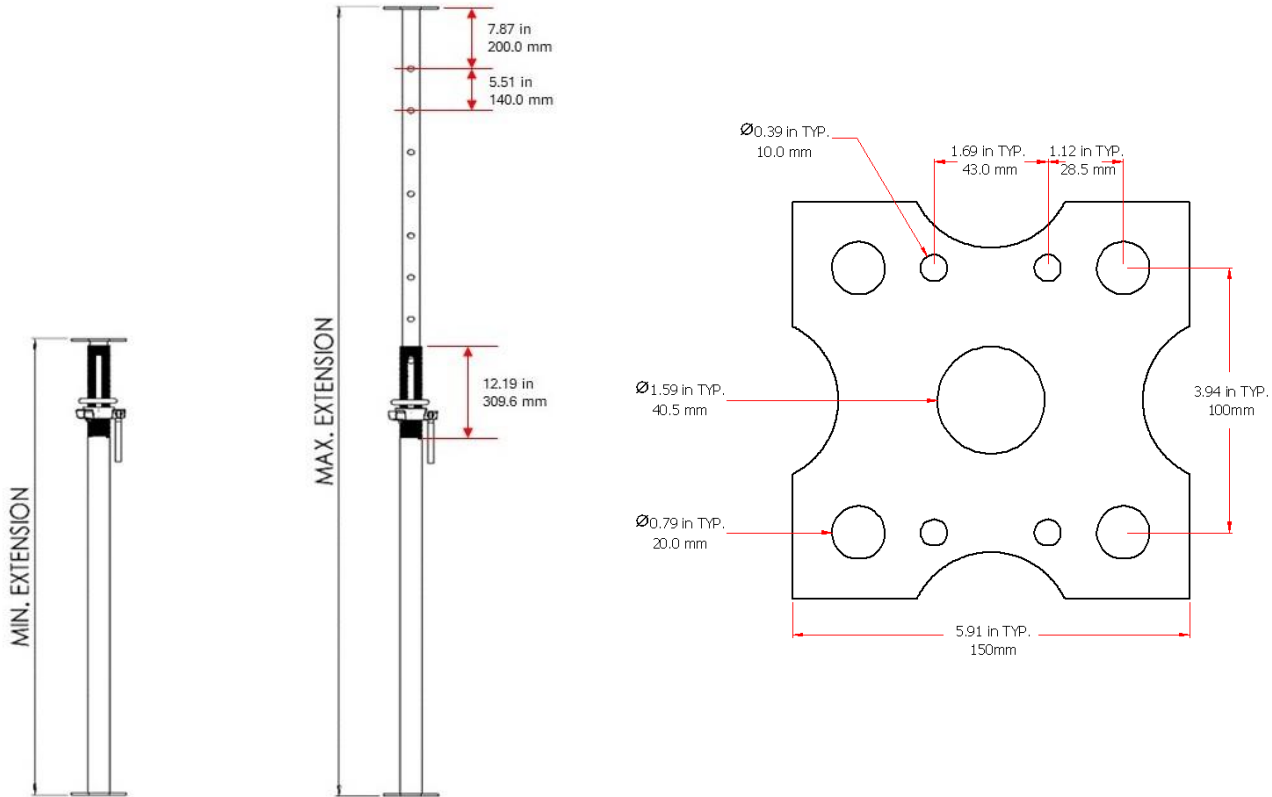


Image is for representation only.

Available Sizes

Part No.	Description	Extension, in[mm]		Weight lb [Kg]	Finish
		Min	Max		
SHPS1	Post Shore, 5'6" - 9'	66 [1,676]	108 [2,743]	39.16 [17.76]	HDG*
SHPS2	Post Shore, 6'9" - 10'6"	81 [2,057]	126 [3,200]	43.9 [19.91]	HDG*
SHPS3	Post Shore, 6'8" - 12'	80 [2,032]	144 [3,658]	49.5 [22.45]	HDG*
SHPS4	Post Shore, 10' - 15'3"	120 [3,048]	183 [4,648]	58.8 [26.67]	HDG*

General Specifications

- Post OD 2.37" [60.3mm]. Wall thickness 0.14" [3.6mm].
- Staff OD 1.9" [48.3mm]. Wall thickness 0.18" [4.6mm].

*Painted finish available upon request



Load Capacity

Extension ft-in [m]	Load Capacity, lbs [kN]			
	SHPS1	SHPS2	SHPS3	SHPS4
5'6" [1.68]	11,600 [51.80]	-	-	-
6' [1.83]	11,600 [51.80]	-	-	-
6'6" [2.01]	10,800 [48.20]	-	-	-
6'8" [2.03]	10,000 [44.44]	-	10,700 [47.56]	-
6'9" [2.06]	10,000 [44.44]	8,600 [38.26]	10,600 [47.11]	-
7' [2.13]	10,000 [44.44]	8500 [37.81]	10,400 [46.22]	-
7'6" [2.31]	9,200 [40.89]	8,300 [36.92]	9,800 [43.56]	-
7'8" [2.34]	8,400 [37.33]	8,000 [35.59]	9,800 [43.56]	-
8' [2.43]	8,400 [37.33]	8,000 [35.59]	9,500 [43.82]	-
8'6" [2.60]	7,600 [33.78]	7,800 [34.70]	9,000 [40.00]	-
8'7" [2.62]	6,800 [30.22]	7,570 [33.67]	9,000 [40.00]	-
9' [2.74]	6,800 [30.22]	7,570 [33.67]	8,600 [38.22]	-
9'6" [2.92]	-	7,300 [32.47]	8,000 [35.56]	-
9'7" [2.92]	-	7,000 [31.14]	8,000 [35.56]	-
10' [3.04]	-	7,000 [31.14]	7,500 [33.33]	9,400 [41.78]
10'6" [3.23]	-	6,800 [30.25]	7,000 [31.11]	8,200 [36.44]
10'9" [3.28]	-	-	6,400 [28.44]	7,700 [34.22]
11' [3.35]	-	-	6,400 [28.44]	7,200 [35.59]
11'7" [3.53]	-	-	5,700 [25.33]	5,900 [26.22]
11'9" [3.58]	-	-	5,200 [23.11]	5,900 [26.22]
12' [3.65]	-	-	5,200 [23.11]	5,500 [24.44]
12'6" [3.84]	-	-	-	4,800 [21.33]
12'10" [3.91]	-	-	-	4,500 [20.00]
13' [3.96]	-	-	-	4,300 [19.11]
13'6" [4.14]	-	-	-	4,000 [17.78]
13'9" [4.19]	-	-	-	3,800 [16.89]
14' [4.26]	-	-	-	3,700 [16.44]
14'9" [4.50]	-	-	-	3,600 [16.00]
15' [4.57]	-	-	-	3,500 [15.56]
15'3" [4.66]	-	-	-	3,400 [15.11]

Note: Load capacity is based on a safety factor of 3:1