

Developed and manufactured to meet ANSI/SSFI SH300-2007 standards.

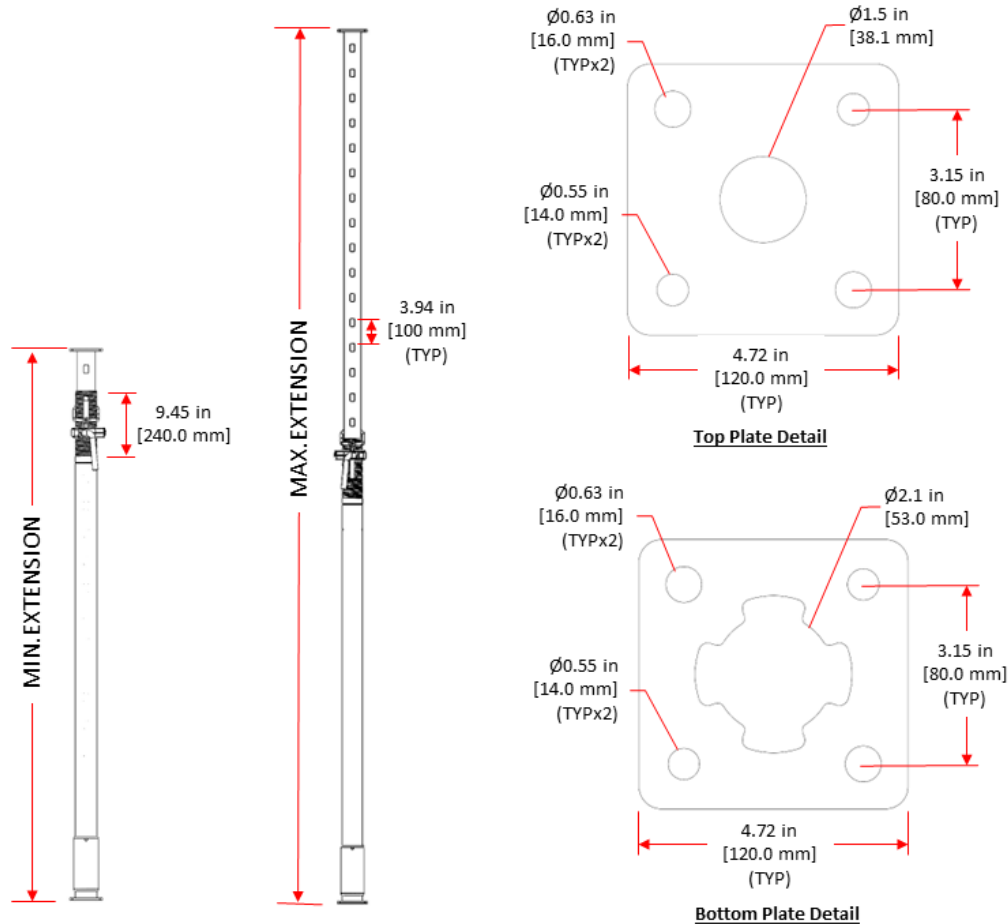


Image is for representation only.

Available Sizes

| Part No. | Description | Extension, ft-in [m] | | Weight lb [Kg] | Finish |
|------------|------------------------|----------------------|-----------------|-------------------|--------|
| | | Min | Max | | |
| SHPSDSS350 | Post Shore, 6'8"-11'6" | 6'8" [2.02] | 11'6" [3.50] | 56.4 [25.7] | HDG* |

*Other finishes available upon request.

General Specifications

- Covers height ranges from 6'8"-11'6"
- Diameter of outer tube is 3 in [76.1 mm].
- Diameter of inner tube is 2.5 in [63.5 mm].
- Quick Release Pin included.
- Universal hole pattern on base plates.

Load Capacity

| Extension ft-in [m] | Allowable Load Capacity lbs [kN] |
|------------------------|-------------------------------------|
| 6'8" [2.03] | 18,814 [83.7] |
| 7' [2.13] | 18,805 [83.7] |
| 7'6" [2.30] | 18,793 [83.6] |
| 8' [2.44] | 18,537 [82.5] |
| 8'6" [2.59] | 18,038 [80.2] |
| 9' [2.74] | 17,294 [76.9] |
| 9'6" [2.90] | 16,308 [72.5] |
| 10' [3.05] | 15,077 [67.1] |
| 10'6" [3.20] | 13,603 [60.5] |
| 11' [3.35] | 11,885 [52.9] |
| 11'6" [3.51] | 10,340 [46.0] |

Note: Allowable load capacity is based in a safety factor of 3:1.

General Disclaimers

1. Published load values are based on a safety factor specified in the cut sheet.
2. DSS recommends that all the job layouts be designed by a qualified professional engineer and that all erection and dismantling be performed by Qualified Personnel.
3. Always consider the load bearing capabilities of all components in the system and static loads when using this equipment.
4. Published values are true for components in good condition. DSS recommends inspecting each component before use.