


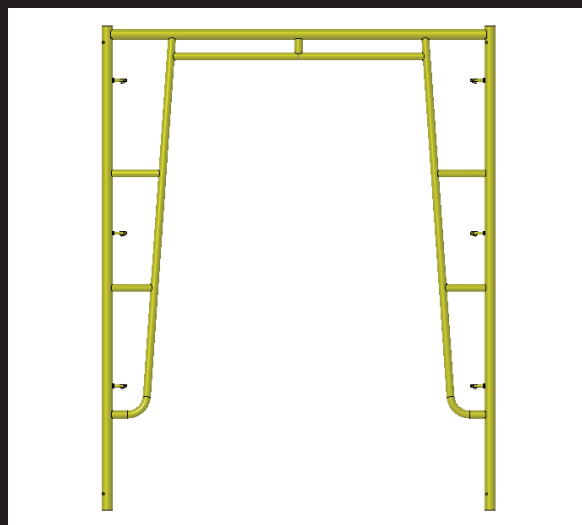


C-Size (Yellow) Frames


World Headquarters: 6059 South Loop East | Houston, TX 77087

Offices In: California | Maryland | Hong Kong | China | United Kingdom | Latin America | Canada


OPEN END FRAMES, C-SIZE (YELLOW)




C-FO3W5H-Q48
3'x5' Open End Frame
1.69", Q-Lk 48" Spacing
36.4 lbs.

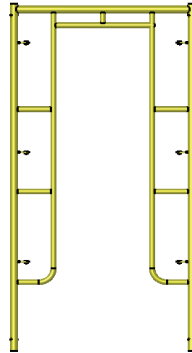


C-FO3W64H-Q48
3'x6'4" Open End Frame
1.69", Q-Lk 48" Spacing
41.3 lbs.

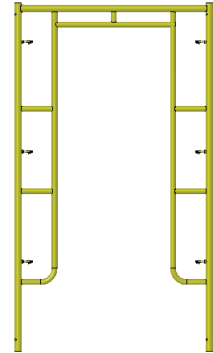


C-FO42W64H-Q48
42"x6'4" Open End Frame
1.69", Q-Lk 48" Spacing
42.3 lbs.

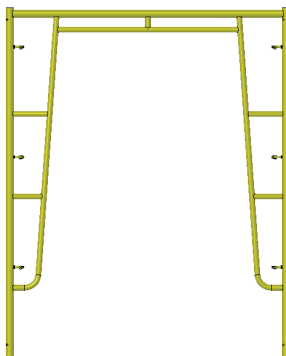

C-FO5W64H-Q48
5'x6'4" Open End Frame
1.69", Q-Lk 48" Spacing
44.8 lbs.

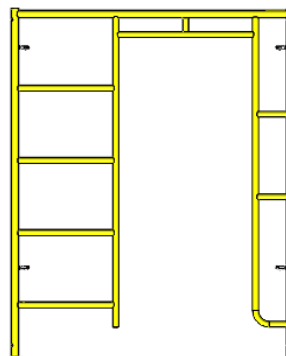

C-FOL5W64H-Q48
5'x6'4" Open End Ladder Frame
1.69", Q-Lk 48" Spacing
50.8 lbs.



PN-CPC
9" C-size Coupling Pin
w/ 1" Collar
1.25 lbs.

C-Size Frame Information


- 1.69" (1-11/16") OD Leg Tube, 13 Gauge
- Uses PN-CPC Coupling Pin
- Standard Color Yellow
- First lock 8.5" from top of frame leg
- Q-Locks
- Spring Retainer hole drilled at 45 degrees

World Headquarters: 6059 South Loop East | Houston, TX 77087


Offices In: California | Maryland | Hong Kong | China | United Kingdom | Latin America | Canada

713-673-7701 Phone | 800-720-6629 Toll Free | www.dss.net


STEP FRAMES, C-SIZE (YELLOW)




C-FS3W3H-Q24
3'x3' Step Frame
1.69", Q-Lk 24" Spacing
26.1 lbs.




C-FS42W3H-Q24
42"x3' Step Frame
1.69", Q-Lk 24" Spacing
26.8 lbs.




C-FS5W2H-Q12
5'x2' Step Frame
1.69", Q-Lk 12" Spacing
23.5 lbs.




C-FS5W3H-Q24
5'x3' Step Frame
1.69", Q-Lk 24" Spacing
27.8 lbs.

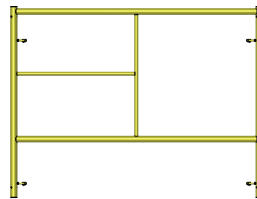

C-FS5W4H-Q36
5'x4' Step Frame
1.69", Q-Lk 24" Spacing
31.8 lbs.



C-FS5W5H-Q48
5'x5' Step Frame
1.69", Q-Lk 48" Spacing
37.1 lbs.



C-FS5W64H-Q48
5'x6'4" Step Frame
1.69", Q-Lk 48" Spacing
44.4 lbs.



PN-CPC
9" C-size Coupling Pin
w/ 1" Collar
1.25 lbs.

C-Size Frame Information

- 1.69" (1-11/16") OD Leg Tube, 13 Gauge
- Uses PN-CPC Coupling Pin
- Standard Color Yellow
- First lock 8.5" from top of frame leg
- Q-Locks
- Spring Retainer hole drilled at 45 degrees

World Headquarters: 6059 South Loop East | Houston, TX 77087

Offices In: California | Maryland | Hong Kong | China | United Kingdom | Latin America | Canada