



Canada

Frames and Accessories

World Headquarters: 6059 South Loop East | Houston, TX 77087

Offices In: California | Maryland | Hong Kong | China | United Kingdom | Latin America | Canada

713-673-7701 Phone | 800-720-6629 Toll Free | www.dss.net


[BACK TO TOP](#)

B-SIZE CANADA FRAMES


B-Size Frame Information

- 1.625" (1-5/8") OD Leg Tube, 13 Gauge
- Uses PN-CPB Coupling Pin
- L6 First Lock 6" from top of frame leg


- Spring Retainer hole drilled at 90 degrees
- L11/L10 First Lock 11.5"/10" from top of frame leg
- Standard Finish Galvanized




B-FL27W3HX27L6
27.5"Wx3'H Ladder Frame
X-Lk 27-3/4" Lk Spacing
21.2 lbs.

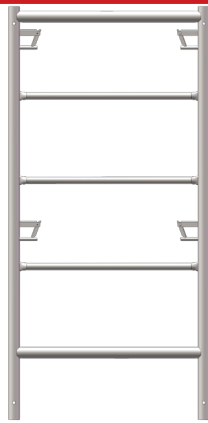

B-FL27W5HX27L6
27.5"Wx5'H Ladder Frame
X-Lk 27-3/4" Lk Spacing
21.2 lbs.




B-FS42W3HX27L6
42"Wx3'H Step Frame X-Lock
X-Lk 27-3/4" Lk Spacing
25.4 lbs.

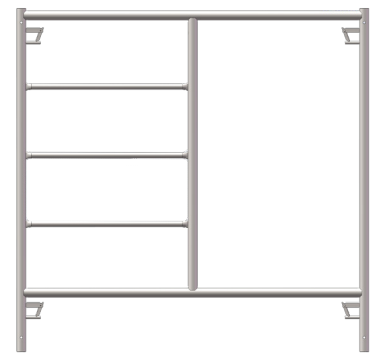


B-FS5W5HX27L6
5'Wx5'H Step Frame X-Lock
X-Lk 27-3/4" Lk Spacing
25.4 lbs.



B-FO3W66HX27L11
3'Wx6'6"H Open Frame X-Lock X-Lk
27-3/4" Lk Spacing
48.4 lbs.

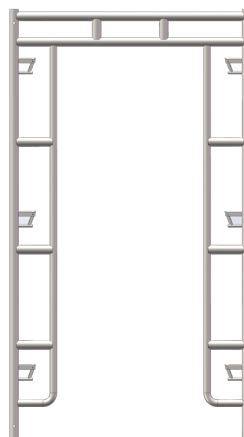

B-FO42W66HX27L11
42"Wx6'6"H Open Frame X-Lock X-Lk
27-3/4" Lk Spacing
50 lbs.

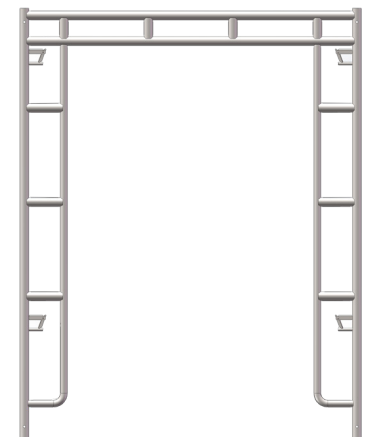

B-FO5W66HX27L11
5'Wx6'6"H Open Frame X-Lock
X-Lk 48" Lk Spacing
45.5 lbs.



PN-CPB
9" B-size Coupling Pin
w/ 1" Collar
1.21 lbs.

World Headquarters: 6059 South Loop East | Houston, TX 77087


Offices In: California | Maryland | Hong Kong | China | United Kingdom | Latin America | Canada

713-673-7701 Phone | 800-720-6629 Toll Free | www.dss.net


C-SIZE CANADA FRAMES

C-Size Frame Information


- 1.69" (1-11/16") OD Leg Tube, 13 Gauge
- L6/L9 First Lock 6"/9" from top of frame leg
- Uses PN-CPC Coupling Pin
- Spring Retainer hole drilled at 90 degrees
- Standard Finish Galvanized

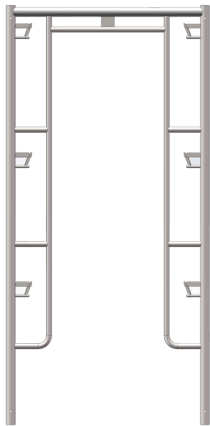

C-FO3W66HX48L6
36"Wx6'6"H Open Frame X-Lock
48" Lk Spacing
39.5lbs.

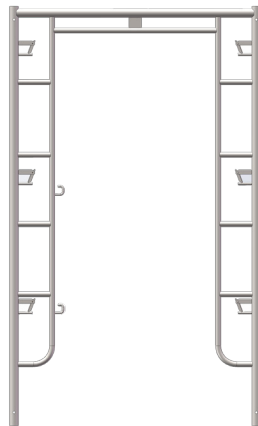


C-FO45W66HX48L6
45"Wx6'6"H Open Frame X-Lock
48" Lk Spacing
43.4lbs.

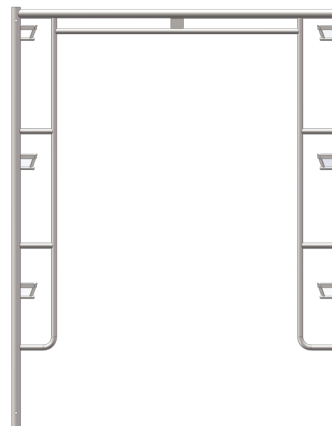


C-FO5W66HX48L6
5'Wx6'6"H Open Frame X-Lock
48" Lk Spacing
43.4lbs.




PN-CPC
9" C-size Coupling Pin
w/ 1" Collar
1.21 lbs.




C-FS5W3HX24L6
36"Wx3'H Step Frame X-Lock
24" Lk Spacing
39.5lbs.

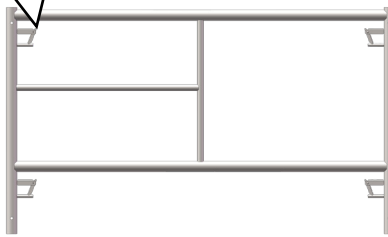

C-FS45W3HX24L6
45"Wx3'H Step Frame X-Lock
24" Lk Spacing
43.4lbs.

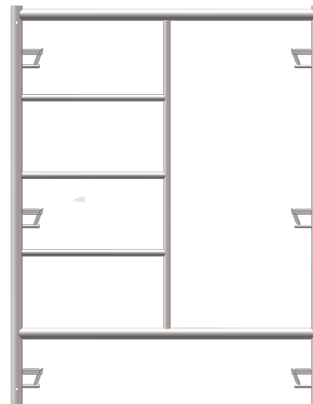

C-FS45W3HX24L6
5'Wx5'H Step Frame X-Lock
48" Lk Spacing
44.3lbs.

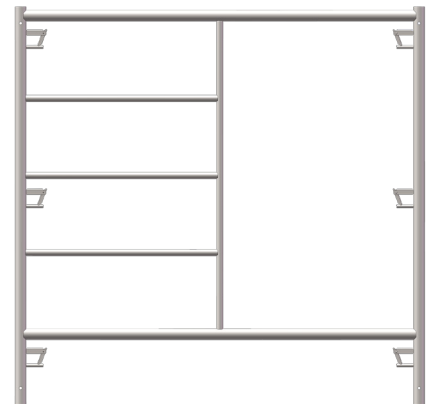

C-FSL5W5HX48L6
5'Wx5'H Ladder Step Frame X-Lock
48" Lk Spacing
42.6lbs.